




















Адаптеры ORFS

Страница / Page		3	4		4		
		6010 ORFS Nut			6015 Sleeve		
		6020 Braze Sleeve					
Страница / Page		5	5	6	6		
		6000 Union ORFS		6300 90°Elbow Union ORFS			
		6350 Union Tee ORFS		6550 Cross Union ORFS			
Страница / Page		7	8	8	9	9	10
		6056 Reducing F ORFS x M ORFS		6055 Swivel Nut Female F ORFS x M ORFS		6205 Swivel Nut Elbow F ORFS x M ORFS	
		6255 Swivel 45° Nut Elbow F ORFS x M ORFS		6620 Swivel Nut Run Tee ORFS		6630 Swivel Nut Branch Tee ORFS	
Страница / Page		10	11	11	12	12	
		6050 Bulkhead Union ORFS		6510 Bulkhead Union Elbow ORFS		6520 Bulkhead 45° Union Elb. ORFS	
		6500 Run Tee Connector ORFS Bulkhead		6490 Bulkhead Branch Tee ORFS			
Страница / Page		13	13	14	14	15	15
		6150 Bulkhead Connector M UNF x M ORFS		6100 Male Connector M UNF x M ORFS		6120 Swivel Nut female F ORFS x M UNF	
		6200 90° Elbow Connector UNF Orientable		6950 Long Adjustable Elbow M ORFS x M UNF		6250 45° Elbow Connector UNF Orientable	
Страница / Page		16	16	17	17		
		6400 Branch Tee Connector UNF Orientable					
		6820 Male Connector M ORFS x M BSPT					
		6830 Male Connector M ORFS x M NPTF					

Адаптеры ORFS


Страница / Page	18	19	19	20	21	22
ORFS BSP						
	6036 Swivel Nut Female F ORFS x M BSP or (ED)	6800 Male Connector M ORFS x M BSP or	6810 Male Connector M ORFS x M BSP	6215 Adjustable Elbow M BSP x M ORFS	6260 Adjustable 45° Elbow M ORFS x M BSP	6340 Adj. Elb. with swivel nut M ORFS x M BSP
Страница / Page	22	23				24
ORFS BSP				ORFS JIC		
	6460 Adjustable Run Tee ORFS - ORFS - BSP	6410 Adjustable Branch Tee ORFS - BSP - ORFS				6125 Swivel Nut Female F ORFS x M JIC
Страница / Page	24	25		25	26	26
ORFS METRIC						
	6900 Male Connector M ORFS x M Metric	6920 Long Male Connector M ORFS x M Metric		6320 Adjustable Elbow M ORFS x M Metric	6940 Long Adjustable Elbow M ORFS x M Metric	6270 Adjustable 45° Elbow M ORFS x M Metric
Страница / Page	27	27	28		29	29
ORFS METRIC				ORFS Plug		
	6420 Adjustable Branch Tee ORFS - Metric - ORFS	6470 Adjustable Run Tee ORFS - ORFS - Metric	6840 Male Connector ORFS Metric (ISO 6149-2)		6600 ORFS Male Plug	6610 ORFS Female Plug

Dimensions and general characteristics may be changed at any time without prior notice.

Data contained herein are for information purpose only, and it does not enlarge, amend or imply any warranty other than provided by us with the product.
Any use of the product not in conformance with our instructions may be dangerous.

6010 Гайка ORFS


ORFS nut



part number	Ø tube		Dimensions			
	mm	inch	F	L	E	
6010-06	6	1/4"	9/16 - 18	15,0	19	
6010-09	8-10	5/16"-3/8"	11/16 - 16	17,0	22	
6010-11	12	1/2"	13/16 - 16	20,0	24	
6010-13	14-16	5/8"	1 - 14	24,0	30	
6010-14	18-20	3/4"	1.3/16 - 12	26,5	36	
6010-15	25	1"	1.7/16 - 12	27,5	41	
6010-21	30-32	1.1/4"	1.11/16 - 12	27,5	50	
6010-32	38	1.1/2"	2 - 12	27,5	60	

6015 Кольцо метрическое

Metric sleeve




part number	Ø tube	Dimensions			
	mm	L	D		
6015-06	06	7,5	06		
6015-08	08	8,5	08		
6015-10	10	8,4	10		
6015-12	12	10,7	12		
6015-14	14	10,5	14		
6015-15	15	10,6	15		
6015-16	16	10,6	16		
6015-18	18	14	18		
6015-20	20	12,1	20		
6015-22	22	13,5	22		
6015-25	25	13,5	25		
6015-28	28	15,5	28		
6015-30	30	13	30		
6015-32	32	13	32		
6015-35	35	15,5	35		
6015-38	38	12,5	38		

6020 Опорная головка

Shoulder

гальваническое покрытие:
surface treatment:


без оцинковки
without zinc plating



part number	Ø tube	Dimensions			
	mm	L	D		
6020-06	06	9,5	06		
6020-08	08	9,5	08		
6020-10	10	9,5	10		
6020-12	12	9,5	12		
6020-14	14	10,5	14		
6020-15	15	10,5	15		
6020-16	16	10,5	16		
6020-18	18	14	18		
6020-20	20	14	20		
6020-22	22	15,5	22		
6020-25	25	15,5	25		
6020-28	28	15,5	28		
6020-30	30	15,5	30		
6020-32	32	15,5	32		
6020-35	35	15,5	35		
6020-38	38	15,5	38		

6000 Коннектор наружная резьба

Male connector




* - F1 и C1 относятся только к переходным размерам

* - F1 and C1 are for jump size only

part number	Ø tube		Dimensions						
	mm	inch	F	F1	L	C	C1	E	
6000-06	6	1/4"	9/16 - 18	-	27	10	-	17	
6000-09	8-10	5/16"-3/8"	11/16 - 16	-	31	11	-	19	
6000-11	12	1/2"	13/16 - 16	-	35	13	-	22	
6000-11-09	8-10-12	5/16 to 1/2	13/16 - 16	11/16 - 16	34	13	11	22	
6000-13	14-16	5/8"	1 - 14	-	43	16	-	27	
6000-13-11	12-14-16	5/8"-1/2"	1 - 14	13/16 - 16	40	16	13	27	
6000-14	18-20	3/4"	1.3/16 - 12	-	47	17	-	32	
6000-14-13	14-16-18-20	5/8"-3/4"	1.3/16 - 12	1 - 14	46	17	16	32	
6000-15	25	1"	1.7/16 - 12	-	49	18	-	38	
6000-15-14	18-20-25	3/4"-1"	1.7/16 - 12	1.3/16 - 12	49	18	17	38	
6000-21	30-32	1.1/4"	1.11/16 - 12	-	51	18	-	46	
6000-32	38	1.1/2"	2 - 12	-	53	18	-	55	

6300 Коннектор 90°


90° Elbow Union

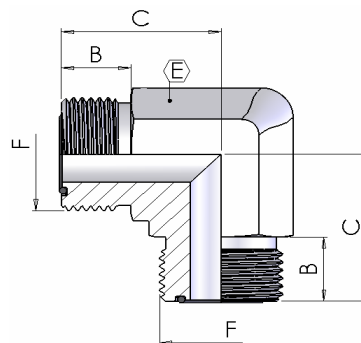

part number	Ø tube		Dimensions				
	mm	inch	F	C	B	E	
6300-06	6	1/4"	9/16 - 18	22	9	14	
6300-09	8-10	5/16"-3/8"	11/16 - 16	25	10	19	
6300-11	12	1/2"	13/16 - 16	28	12	19	
6300-13	14-16	5/8"	1 - 14	33	14	27	
6300-14	18-20	3/4"	1.3/16 - 12	37	15	30	
6300-15	25	1"	1.7/16 - 12	38	18	32	
6300-21	30-32	1.1/4"	1.11/16 - 12	45	18	41	
6300-32	38	1.1/2"	2 - 12	49	18	48	

6350 Тройник


Union Tee

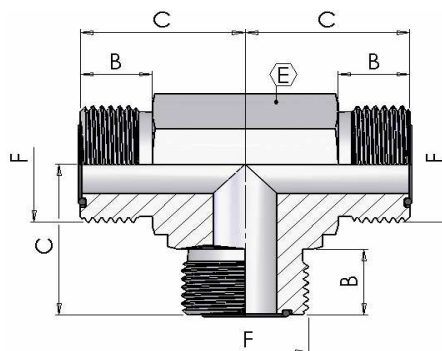

part number	Ø tube		Dimensions				
	mm	inch	F	C	B	E	
6350-06	6	1/4"	9/16 - 18	22	10	14	
6350-09	8-10	5/16"-3/8"	11/16 - 16	25	11	19	
6350-11	12	1/2"	13/16 - 16	28	13	19	
6350-13	14-16	5/8"	1 - 14	34	16	27	
6350-14	18-20	3/4"	1.3/16 - 12	38	17	33	
6350-15	25	1"	1.7/16 - 12	42	18	41	
6350-21	30-32	1.1/4"	1.11/16 - 12	45	18	41	
6350-32	38	1.1/2"	2 - 12	49	18	48	

6550 X-образный коннектор



Cross Union

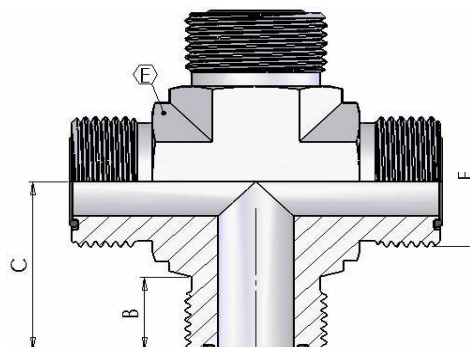

part number	Ø tube		Dimensions				
	mm	inch	F	C	B	E	
6550-06	6	1/4"	9/16 - 18	22	10	14	
6550-09	8-10	5/16"-3/8"	11/16 - 16	25	11	19	
6550-11	12	1/2"	13/16 - 16	28	13	19	
6550-13	14-16	5/8"	1 - 14	33	16	27	
6550-14	18-20	3/4"	1.3/16 - 12	37	17	30	
6550-15	25	1"	1.7/16 - 12	42	18	37	
6550-21	30-32	1.1/4"	1.11/16 - 12	45	18	41	
6550-32	38	1.1/2"	2 - 12	49	18	48	

6056 Редукционный коннектор ORFS


Reducing male - female ORFS

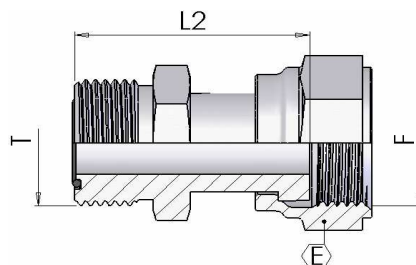

part number	Ø tube		Dimensions					
	mm	inch	F	T	L	L2	E	
6056-09-06	10-06	3/8"-1/4"	11/16""-16	9/16""-18	-	20	22	
6056-11-06	12-06	1/2"-1/4"	13/16""-16	9/16""-18	22	-	24	
6056-11-09	12-10	1/2"-3/8"	13/16""-16	11/16""-16	-	23	24	
6056-13-06	16-06	5/8"-1/4"	1"-14	9/16""-18	23	-	30	
6056-13-09	16-08	5/8"-5/16"	1"-14	11/16""-16	24	-	30	
6056-13-11	16-12	5/8"-1/2"	1"-14	13/16""-16	26	-	30	
6056-14-06	20-06	3/4"-1/4"	1.3/16""-12	9/16""-18	25	-	36	
6056-14-09	20-08	3/4"-5/16"	1.3/16""-12	11/16""-16	26	-	36	
6056-14-11	20-12	3/4"-1/2"	1.3/16""-12	13/16""-12	28	-	36	
6056-14-13	20-16	3/4"-5/8"	1.3/16""-12	1"-14	-	30	36	
6056-15-11	25-12	1"-1/2"	1.7/16""-12	13/16""-12	29	-	41	
6056-15-13	25-16	1"-5/8"	1.7/16""-12	1"-14	32	-	41	
6056-15-14	25-20	1"-3/4"	1.7/16""-12	1.3/16""-12	-	33	41	
6056-21-14	32-20	1 1/4"-3/4"	1.11/16""-12	1.3/16""-12	34	-	50	
6056-21-15	32-25	1-1 1/4"	1.11/16""-12	1.7/16""-12	-	39	50	
6056-32-15	38-25	1 1/2"-1"	2"-12	1.7/16""-12	34	-	60	
6056-32-21	38-32	1 1/2"-1 1/4"	2"-12	1.11/16""-12	34	-	60	

6055 Коннектор ORFS


Swivel Union M/F ORFS

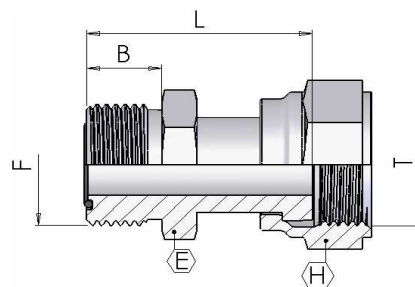

part number	Ø tube		Dimensions					
	mm	inch	F	T	B	L	E	
6055-06	6	1/4"	9/16"-18	9/16"-18	10	27	17	
6055-09	8-10	5/16"-3/8"	11/16"-16	11/16"-16	11	33	19	
6055-11	12	1/2"	13/16"-16	13/16"-16	13	36	22	
6055-13	14-16	5/8"	1"-14	1"-14	16	43	27	
6055-14	18-20	3/4"	1.3/16"-12	1.3/16"-12	17	43	32	
6055-15	25	1"	1.7/16"-12	1.7/16"-12	18	47	38	
6055-21	30-32	1.1/4"	1.11/16"-12	1.11/16"-12	18	48	46	
6055-32	38	1.1/2"	2"-12	2"-12	18	49	55	

6205 Коннектор 90° ORFS


Swivel Nut Elbow M/F ORFS

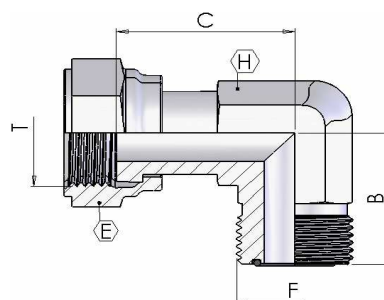

part number	Ø tube		Dimensions						
	mm	inch	F	T	B	C	H	E	
6205-06	6	1/4"	9/16"-18	9/16"-18	22	27	14	19	
6205-09	8-10	5/16"-3/8"	11/16"-16	11/16"-16	25	29	19	22	
6205-11	12	1/2"	13/16"-16	13/16"-16	28	38	19	24	
6205-13	14-16	5/8"	1"-14	1"-14	34	41	27	30	
6205-14	18-20	3/4"	1.3/16"-12	1.3/16"-12	38	47	30	36	
6205-15	25	1"	1.7/16"-12	1.7/16"-12	42	54	37	41	
6205-21	30-32	1.1/4"	1.11/16"-12	1.11/16"-12	45	58	41	50	
6205-32	38	1.1/2"	2"-12	2"-12	49	61	48	60	

6255 Коннектор 45°ORFS


Swivel 45° Nut Elbow M/F ORFS

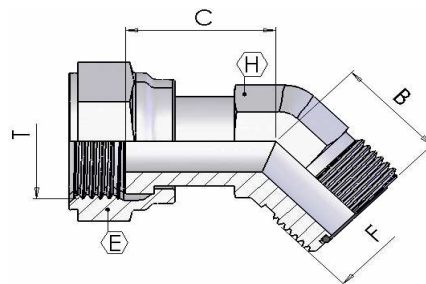

part number	Ø tube		Dimensions						
	mm	inch	F	T	B	C	H	E	
6255-06	6	1/4"	9/16"-18	9/16"-18	16	22	14	19	
6255-09	8-10	5/16"-3/8"	11/16"-16	11/16"-16	19	27	19	22	
6255-11	12	1/2"	13/16"-16	13/16"-16	21	31	19	24	
6255-13	14-16	5/8"	1"-14	1"-14	24	37	27	30	
6255-14	18-20	3/4"	1.3/16"-12	1.3/16"-12	26	42	30	36	
6255-15	25	1"	1.7/16"-12	1.7/16"-12	30	47	37	41	
6255-21	30-32	1.1/4"	1.11/16"-12	1.11/16"-12	32	47	41	50	
6255-32	38	1.1/2"	2"-12	2"-12	37	49	48	60	

6620 Тройник боковая гайка


Female run tee

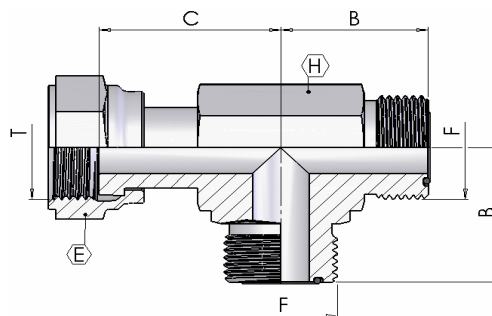

part number	Ø tube		Dimensions						
	mm	inch	F	T	B	C	H	E	
6620-06	6	1/4"	9/16"-18	9/16"-18	22	27	14	19	
6620-09	8-10	5/16"-3/8"	11/16"-16	11/16"-16	25	29	19	22	
6620-11	12	1/2"	13/16"-16	13/16"-16	28	38	19	24	
6620-13	14-16	5/8"	1"-14	1"-14	34	41	27	30	
6620-14	18-20	3/4"	1.3/16"-12	1.3/16"-12	38	47	30	36	
6620-15	25	1"	1.7/16"-12	1.7/16"-12	42	54	37	41	
6620-21	30-32	1.1/4"	1.11/16"-12	1.11/16"-12	45	58	41	50	
6620-32	38	1.1/2"	2"-12	2"-12	49	61	48	60	

6630 Тройник нижняя гайка


Female branch tee

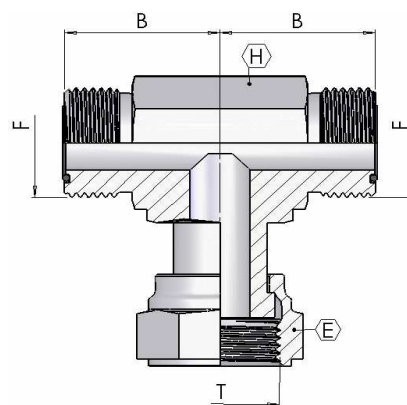

part number	Ø tube		Dimensions						
	mm	inch	F	T	B	C	H	E	
6630-06	6	1/4"	9/16"-18	9/16"-18	22	27	14	19	
6630-09	8-10	5/16"-3/8"	11/16"-16	11/16"-16	25	29	19	22	
6630-11	12	1/2"	13/16"-16	13/16"-16	28	38	19	24	
6630-13	14-16	5/8"	1"-14	1"-14	34	41	27	30	
6630-14	18-20	3/4"	1.3/16"-12	1.3/16"-12	38	47	30	36	
6630-15	25	1"	1.7/16"-12	1.7/16"-12	42	54	37	41	
6630-21	30-32	1.1/4"	1.11/16"-12	1.11/16"-12	45	58	41	50	
6630-32	38	1.1/2"	2"-12	2"-12	49	61	48	60	

6050 Контргайка


Bulkhead

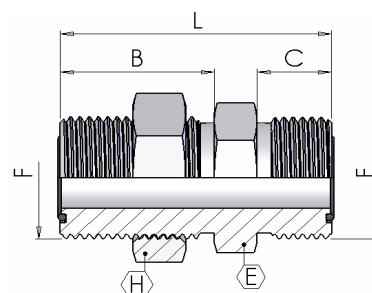

part number	Dimensions						
	F	C	L	B	E	H	
6050-06	9/16 - 18	10	48	32	17	22	
6050-09	11/16 - 16	11	53	34	19	27	
6050-11	13/16 - 16	13	58	37	22	30	
6050-13	1 - 14	16	67	41	27	36	
6050-14	1.3/16 - 12	17	69	42	32	41	
6050-15	1.7/16 - 12	18	70	42	38	46	
6050-21	1.11/16 - 12	18	70	42	46	50	
6050-32	2 - 12	18	70	42	55	60	

6510 Переборочный адаптер 90°


Bulkhead 90° Elbow Union

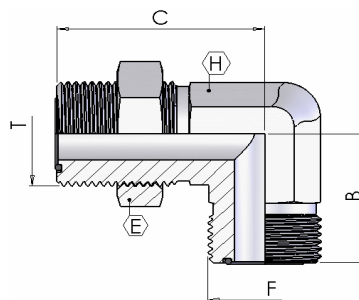

part number	Ø tube		Dimensions						
	mm	inch	F	T	B	C	E	H	
6510-06	6	1/4"	9/16"-18	9/16"-18	23	47	22	14	
6510-09	8-10	5/16"-3/8"	11/16"-16	11/16"-16	26	52	27	19	
6510-11	12	1/2"	13/16"-16	13/16"-16	29	56	30	19	
6510-13	14-16	5/8"	1"-14	1"-14	35	63	36	27	
6510-14	18-20	3/4"	1.3/16"-12	1.3/16"-12	39	67	41	30	
6510-15	25	1"	1.7/16"-12	1.7/16"-12	43	71	46	37	
6510-21	30-32	1.1/4"	1.11/16"-12	1.11/16"-12	46	76	50	41	
6510-32	38	1.1/2"	2"-12	2"-12	50	80	60	48	

6520 Переборочный адаптер 45°


Bulkhead 45° Elbow Union

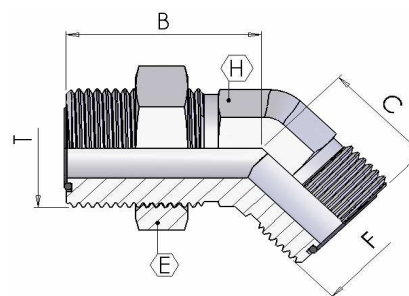

part number	Ø tube		Dimensions						
	mm	inch	F	T	B	C	E	H	
6520-06	6	1/4"	9/16"-18	9/16"-18	47	23	22	14	
6520-09	8-10	5/16"-3/8"	11/16"-16	11/16"-16	52	26	27	19	
6520-11	12	1/2"	13/16"-16	13/16"-16	56	29	30	19	
6520-13	14-16	5/8"	1"-14	1"-14	63	35	36	27	
6520-14	18-20	3/4"	1.3/16"-12	1.3/16"-12	67	39	41	30	
6520-15	25	1"	1.7/16"-12	1.7/16"-12	71	43	46	37	
6520-21	30-32	1.1/4"	1.11/16"-12	1.11/16"-12	76	46	50	41	
6520-32	38	1.1/2"	2"-12	2"-12	80	50	60	48	

6500
**Тройник переборочный
боковое подсоединение**


Bulkhead male run tee

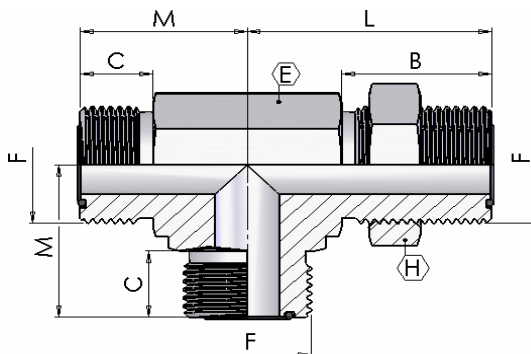

part number	Ø tube		Dimensions							
	mm	inch	F	C	L	B	M	H	E	
6500-06	6	1/4"	9/16 - 18	10	47	32	22	22	14	
6500-09	8-10	5/16"-3/8"	11/16 - 16	11	52	34	25	27	19	
6500-11	12	1/2"	13/16 - 16	13	55	37	28	30	19	
6500-13	14-16	5/8"	1 - 14	16	63	41	33	36	27	
6500-14	18-20	3/4"	1.3/16 - 12	17	67	42	37	41	30	
6500-15	25	1"	1.7/16 - 12	18	71	42	42	46	37	
6500-21	30-32	1.1/4"	1.11/16 - 12	18	75	42	45	50	41	
6500-32	38	1.1/2"	2 - 12	18	80	42	49	60	48	

6490
**Тройник переборочный
нижнее подсоединение**


Bulkhead male Branch tee

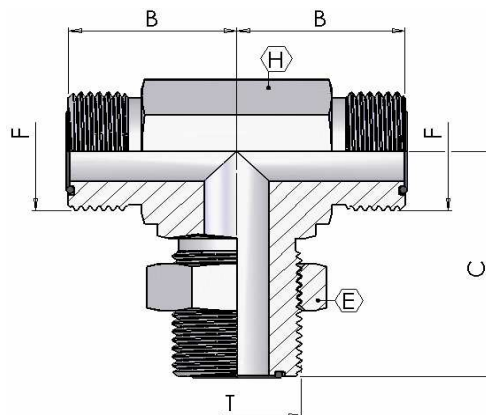

part number	Ø tube		Dimensions						
	mm	inch	F	T	B	C	E	H	
6490-06	6	1/4"	9/16"-18	9/16"-18	23	47	22	14	
6490-09	8-10	5/16"-3/8"	11/16"-16	11/16"-16	26	52	27	19	
6490-11	12	1/2"	13/16"-16	13/16"-16	29	56	30	19	
6490-13	14-16	5/8"	1"-14	1"-14	35	63	36	27	
6490-14	18-20	3/4"	1.3/16"-12	1.3/16"-12	39	67	41	30	
6490-15	25	1"	1.7/16"-12	1.7/16"-12	43	71	46	37	
6490-21	30-32	1.1/4"	1.11/16"-12	1.11/16"-12	46	76	50	41	
6490-32	38	1.1/2"	2"-12	2"-12	50	80	60	48	

6150 Переборочный коннектор UNF X ORFS

Straight bulkhead UNF male X ORFS male

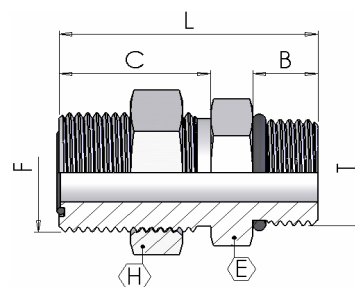


Резьба / Thread:
UNF/UN (ISO 11926-1)

part number	Ø tube		Dimensions							
	mm	inch	T	F	C	L	B	E	H	
6150-04-06	6	1/4"	7/16 - 20	9/16 - 18	32	49	11	17	22	
6150-06-09	8-10	5/16"-3/8"	9/16 - 18	11/16 - 16	34	54	12	19	27	
6150-08-11	12	1/2"	3/4 - 16	13/16 - 16	37	60	14	22	30	
6150-10-13	14-16	5/8"	7/8 - 14	1 - 14	41	67	16	27	36	
6150-12-14	18-20	3/4"	1.1/16 - 12	1.3/16 - 12	42	71	19	32	41	
6150-16-15	25	1"	1.5/16 - 12	1.7/16 - 12	42	71	19	38	46	
6150-20-21	30-32	1.1/4"	1.5/8 - 12	1.11/16 - 12	42	71	19	46	50	
6150-24-32	38	1.1/2"	1.7/8 - 12	2 - 12	42	71	19	55	60	

6100 Коннектор UNF X ORFS

UNF male X ORFS male connector




Резьба / Thread:
UNF/UN (ISO 11926-1)

part number	Ø tube		Dimensions						
	mm	inch	F	T	C	L	B	E	
6100-04-06	6	1/4"	7/16 - 20	9/16 - 18	10	29	11	17	
6100-06-06	8-10	5/16"-3/8"	9/16 - 18	9/16 - 18	10	31	12	19	
6100-06-09	8-10	5/16"-3/8"	9/16 - 18	11/16 - 16	11	32	12	19	
6100-08-11	12	1/2"	3/4 - 16	13/16 - 16	13	37	14	22	
6100-10-09	8-10	5/16"-3/8"	7/8 - 14	11/16 - 16	11	39	16	27	
6100-10-13	14-16	5/8"	7/8 - 14	1 - 14	16	43	16	27	
6100-10-14	18-20	3/4"	7/8 - 14	1.3/16 - 12	17	51	13	32	
6100-12-14	18-20	3/4"	1.1/16 - 12	1.3/16 - 12	17	49	19	32	
6100-12-15	25	1"	1.1/16 - 12	1.7/16 - 12	18	54	19	38	
6100-16-14	18-20	3/4"	1.5/16 - 12	1.3/16 - 12	17	50	19	38	
6100-16-15	25	1"	1.5/16 - 12	1.7/16 - 12	18	50	19	38	
6100-20-15	25	1"	1.5/8 - 12	1.7/16 - 12	18	52	19	46	
6100-20-21	30-32	1.1/4"	1.5/8 - 12	1.11/16 - 12	18	52	19	46	
6100-24-32	38	1.1/2"	1.7/8 - 12	2 - 12	18	54	19	55	

6120 Вращающийся коннектор ORFS/UNF

Swivel Nut Female ORFS/UNF

Резьба / Thread:
UNF/UN (ISO 11926-1)

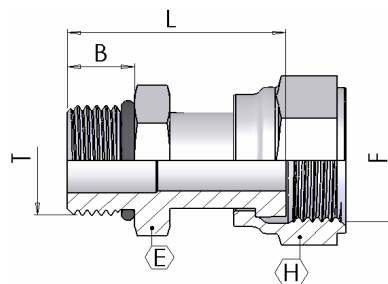


part number	Ø tube		Dimensions						
	mm	inch	F	T	B	L	E	H	
6120-04-06	6	1/4"	9/16"-18	7/16-20	11	38	16	19	
6120-04-09	8-10	5/16"-3/8"	11/16"-16	7/16-20	11	-	19	22	
6120-06-09	8-10	5/16"-3/8"	11/16"-16	9/16-18	12	41	19	22	
6120-08-09	8-10	5/16"-3/8"	11/16"-16	3/4-16	14	-	22	22	
6120-08-11	12	1/2"	13/16"-16	3/4-16	14	50	22	24	
6120-08-13	14-16	5/8"	1"-14	3/4-16	14	-	27	30	
6120-10-11	12	1/2"	13/16"-16	7/8-14	16	-	27	24	
6120-10-13	14-16	5/8"	1"-14	7/8-14	16	54	27	30	
6120-10-14	18-20	3/4"	1.3/16"-12	7/8-14	16	-	32	36	
6120-12-13	14-16	5/8"	1"-14	1.1/16-12	19	-	32	30	
6120-12-14	18-20	3/4"	1.3/16"-12	1.1/16-12	19	60	32	36	
6120-16-14	18-20	3/4"	1.3/16"-12	1.5/16-12	19	-	38	36	
6120-16-15	25	1"	1.7/16"-12	1.5/16-12	19	68	38	41	
6120-20-21	30-32	1.1/4"	1.11/16"-12	1.5/8-12	19	68	50	50	
6120-24-32	38	1.1/2"	2"-12	1.7/8-12	19	68	55	60	

6200 Регулируемый коннектор 90° ORFS/UNF

90° elbow "adjustable" connector ORFS male X UNF male


Резьба / Thread:
UNF/UN (ISO 11926-1)

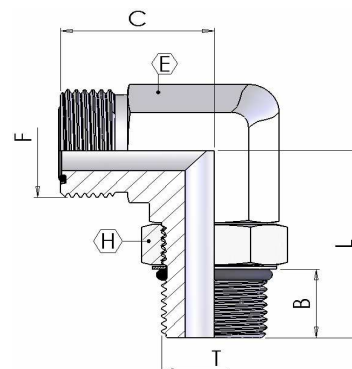

part number	Ø tube		Dimensions							
	mm	inch	T	F	C	L	B	H	E	
6200-04-06	6	1/4"	7/16 - 20	9/16 - 18	22	33	11	17	14	
6200-06-06	6	1/4"	9/16 - 18	9/16 - 18	23	37	12	17	19	
6200-06-09	8-10	5/16"-3/8"	9/16 - 18	11/16 - 16	25	37	12	19	19	
6200-08-11	12	1/2"	3/4 - 16	13/16 - 16	28	41	14	22	19	
6200-10-13	14-16	5/8"	7/8 - 14	1 - 14	33	50	16	27	27	
6200-12-14	18-20	3/4"	1.1/16 - 12	1.3/16 - 12	37	55	19	32	30	
6200-16-15	25	1"	1.5/16 - 12	1.7/16 - 12	42	60	19	38	37	
6200-20-21	30-32	1.1/4"	1.5/8 - 12	1.11/16 - 12	45	62	19	46	41	
6200-24-32	38	1.1/2"	1.7/8 - 12	2 - 12	49	66	19	55	48	

6950
**Регулируемый коннектор 90°
ORFS/UNF, удлиненный**


Long Adjustable Elbow ORFS/UNF

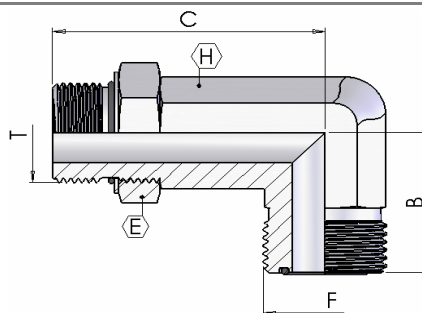Резьба / Thread:
UNF/UN (ISO 11926-1)


part number	Ø tube		Dimensions						
	mm	inch	F	T	B	C	E	H	
6950-04-06	6	1/4"	9/16"-18	7/16-20	22	57	16	14	
6950-04-09	8-10	5/16"-3/8"	11/16"-16	7/16-20	25	-	16	19	
6950-06-09	8-10	5/16"-3/8"	11/16"-16	9/16-18	25	67	19	19	
6950-08-09	8-10	5/16"-3/8"	11/16"-16	3/4-16	27	75	24	19	
6950-08-11	12	1/2"	13/16"-16	3/4-16	28	75	24	19	
6950-08-13	14-16	5/8"	1"-14	3/4-16	34	-	24	27	
6950-10-11	12	1/2"	13/16"-16	7/8-14	31	89	27	27	
6950-10-13	14-16	5/8"	1"-14	7/8-14	34	89	27	27	
6950-10-14	18-20	3/4"	1.3/16"-12	7/8-14	-	-	27	30	
6950-12-13	14-16	5/8"	1"-14	1.1/16-12	36	101	36	30	
6950-12-14	18-20	3/4"	1.3/16"-12	1.1/16-12	38	101	36	30	
6950-16-14	18-20	3/4"	1.3/16"-12	1.5/16-12	41	115	41	37	
6950-16-15	25	1"	1.7/16"-12	1.5/16-12	42	115	41	37	
6950-20-21	30-32	1.1/4"	1.11/16"-12	1.5/8-12	45	127	50	41	
6950-24-32	38	1.1/2"	2"-12	1.7/8-12	49	139	55	48	

6250
Регулируемый коннектор 45° ORFS/UNF


45° elbow "adjustable" connector ORFS male X UNF male

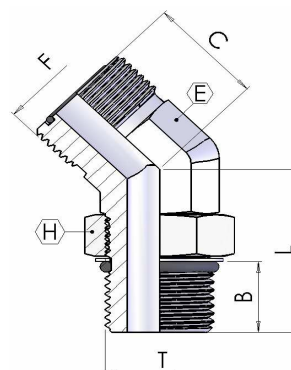Резьба / Thread:
UNF/UN (ISO 11926-1)


part number	Ø tube		Dimensions							
	mm	inch	T	F	C	L	B	H	E	
6250-04-06	6	1/4"	7/16 - 20	9/16 - 18	16	30	10	17	14	
6250-06-09	8-10	5/16"-3/8"	9/16 - 18	11/16 - 16	19	33	12	19	19	
6250-08-11	12	1/2"	3/4 - 16	13/16 - 16	20	36	13	22	19	
6250-10-13	14-16	5/8"	7/8 - 14	1 - 14	23	45	14	27	27	
6250-12-14	18-20	3/4"	1.1/16 - 12	1.3/16 - 12	26	50	17	32	30	
6250-16-15	25	1"	1.5/16 - 12	1.7/16 - 12	30	52	17	38	37	
6250-20-21	30-32	1.1/4"	1.5/8 - 12	1.11/16 - 12	32	54	17	46	41	
6250-24-32	38	1.1/2"	1.7/8 - 12	2 - 12	37	54	17	55	48	

6400 **Тройник регулируемый UNF**

Adjustable UNF male branch Tee

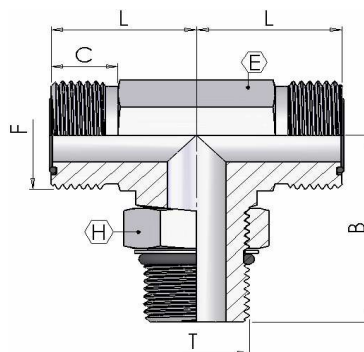


Резьба / Thread:
UNF/UN (ISO 11926-1)

part number	Ø tube		Dimensions							
	mm	inch	T	F	C	L	B	H	E	
6400-04-06	6	1/4"	7/16 - 20	9/16 - 18	10	22	33	17	14	
6400-06-09	8-10	5/16"-3/8"	9/16 - 18	11/16 - 16	11	25	37	19	19	
6400-08-11	12	1/2"	3/4 - 16	13/16 - 16	13	28	41	22	19	
6400-10-13	14-16	5/8"	7/8 - 14	1 - 14	16	33	50	27	27	
6400-12-14	18-20	3/4"	1.1/16 - 12	1.3/16 - 12	17	37	55	32	30	
6400-16-15	25	1"	1.5/16 - 12	1.7/16 - 12	18	42	60	38	37	
6400-20-21	30-32	1.1/4"	1.5/8 - 12	1.11/16 - 12	18	45	62	46	41	
6400-24-32	38	1.1/2"	1.7/8 - 12	2 - 12	18	49	66	55	48	

6450 **Тройник регулируемый UNF**

Adjustable UNF male run Tee

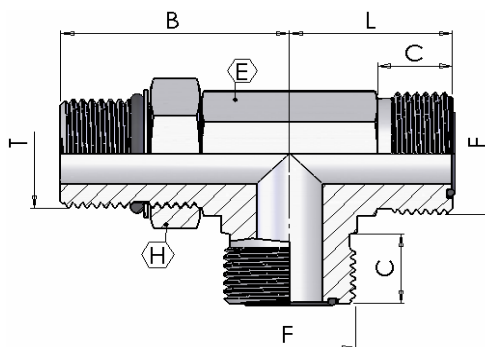

Резьба / Thread:
UNF/UN (ISO 11926-1)


part number	Ø tube		Dimensions							
	mm	inch	T	F	C	L	B	H	E	
6450-04-06	6	1/4"	7/16 - 20	9/16 - 18	10	22	33	17	14	
6450-06-09	8-10	5/16"-3/8"	9/16 - 18	11/16 - 16	11	25	37	19	19	
6450-08-11	12	1/2"	3/4 - 16	13/16 - 16	13	28	41	22	19	
6450-10-13	14-16	5/8"	7/8 - 14	1 - 14	16	33	50	27	27	
6450-12-14	18-20	3/4"	1.1/16 - 12	1.3/16 - 12	17	37	55	32	30	
6450-16-15	25	1"	1.5/16 - 12	1.7/16 - 12	18	42	60	38	37	
6450-20-21	30-32	1.1/4"	1.5/8 - 12	1.11/16 - 12	18	45	62	46	41	
6450-24-32	38	1.1/2"	1.7/8 - 12	2 - 12	18	49	66	55	48	

6820 Коннектор ORFS/BSPT

Male Connector ORFS/BSPT

Резьба / Thread:

BSPT (Form C DIN 3852)




part number	Ø tube		Dimensions						
	mm	inch	F	T	B	C	L	E	
6820-02-06	6	1/4"	9/16"-18	1/8	10	10	27	16	
6820-04-06	6	1/4"	9/16"-18	1/4	15	10	33	16	
6820-04-09	8-10	5/16"-3/8"	11/16"-16	1/4	15	11	34	19	
6820-04-11	12	1/2"	13/16"-16	1/4	15	13	36	22	
6820-06-09	8-10	5/16"-3/8"	11/16"-16	3/8	15	11	34	19	
6820-06-11	12	1/2"	13/16"-16	3/8	15	13	36	22	
6820-06-13	14-16	5/8"	1"-14	3/8	15	16	40	27	
6820-08-11	12	1/2"	13/16"-16	1/2	19	13	42	22	
6820-08-13	14-16	5/8"	1"-14	1/2	19	16	45	27	
6820-08-14	18-20	3/4"	1.3/16"-12	1/2	19	17	48	32	
6820-12-13	14-16	5/8"	1"-14	3/4	19	16	47	27	
6820-12-14	18-20	3/4"	1.3/16"-12	3/4	19	17	48	23	
6820-12-15	25	1"	1.7/16"-12	3/4	19	18	49	38	
6820-16-14	18-20	3/4"	1.3/16"-12	1	24	17	54	36	
6820-16-15	25	1"	1.7/16"-12	1	24	18	54	38	
6820-16-21	30-32	1.1/4"	1.11/16"-12	1	24	18	56	46	
6820-20-21	30-32	1.1/4"	1.11/16"-12	1.1/4	25	18	56	46	
6820-20-32	38	1.1/2"	2"-12	1.1/4	25	18	58	55	
6820-24-32	38	1.1/2"	2"-12	1.1/2	25	18	59	55	

6830 Коннектор ORFS/NPTF

Male Connector ORFS/NPTF

Резьба / Thread:


NPT (ANSI/ASME B1.20.1-1983)



part number	Ø tube		Dimensions						
	mm	inch	F	T	B	C	L	E	
6830-02-06	6	1/4"	9/16"-18	1/8	10	10	27	16	
6830-04-06	6	1/4"	9/16"-18	1/4	15	10	33	16	
6830-04-09	8-10	5/16"-3/8"	11/16"-16	1/4	15	11	34	19	
6830-04-11	12	1/2"	13/16"-16	1/4	15	13	36	22	
6830-06-09	8-10	5/16"-3/8"	11/16"-16	3/8	15	11	34	19	
6830-06-11	12	1/2"	13/16"-16	3/8	15	13	36	22	
6830-06-13	14-16	5/8"	1"-14	3/8	15	16	40	27	
6830-08-11	12	1/2"	13/16"-16	1/2	19	13	42	22	
6830-08-13	14-16	5/8"	1"-14	1/2	19	16	45	27	
6830-08-14	18-20	3/4"	1.3/16"-12	1/2	19	17	48	32	
6830-12-13	14-16	5/8"	1"-14	3/4	19	16	47	27	
6830-12-14	18-20	3/4"	1.3/16"-12	3/4	19	17	48	23	
6830-12-15	25	1"	1.7/16"-12	3/4	19	18	49	38	
6830-16-14	18-20	3/4"	1.3/16"-12	1	24	17	54	36	
6830-16-15	25	1"	1.7/16"-12	1	24	18	54	38	
6830-16-21	30-32	1.1/4"	1.11/16"-12	1	24	18	56	46	
6830-20-21	30-32	1.1/4"	1.11/16"-12	1.1/4	25	18	56	46	
6830-20-32	38	1.1/2"	2"-12	1.1/4	25	18	58	55	
6830-24-32	38	1.1/2"	2"-12	1.1/2	25	18	59	55	

6036 **Коннектор ORFS/BSP**

Swivel Nut Female ORFS/BSP with "ED" seal (DIN 3852 form E)

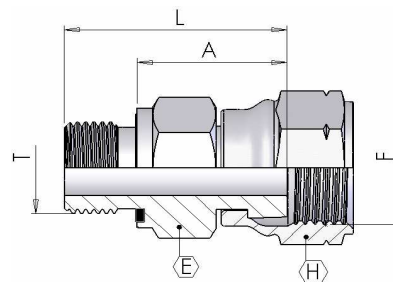


Резьба / Thread:

BSPP (Form E DIN 3852)

part number	Ø tube		Dimensions						
	mm	inch	F	T	A	L	E	H	
6036-02-06	6	1/4"	9/16"-18	1/8	26	34	17	14	
6036-04-06	6	1/4"	9/16"-18	1/4	26	38	17	19	
6036-04-09	8-10	5/16"-3/8"	11/16"-16	1/4	28	40	22	19	
6036-04-11	12	1/2"	13/16"-16	1/4	35	47	24	22	
6036-06-09	8-10	5/16"-3/8"	11/16"-16	3/8	28	40	22	22	
6036-06-11	12	1/2"	13/16"-16	3/8	35	47	24	22	
6036-08-09	8-10	5/16"-3/8"	11/16"-16	1/2	28	42	22	27	
6036-08-11	12	1/2"	13/16"-16	1/2	35	49	24	27	
6036-08-13	14-15-16	5/8"	1"-14	1/2	38	52	30	27	
6036-08-14	18-20	3/4"	1.3/16"-12	1/2	41	55	36	30	
6036-12-13	14-15-16	5/8"	1"-14	3/4	38	54	30	32	
6036-12-14	18-20	3/4"	1.3/16"-12	3/4	41	57	36	32	
6036-16-15	22-25	1"	1.7/16"-12	1	49	67	41	41	
6036-20-21	28-30-32	1.1/4"	1.11/16"-12	1.1/4	49	69	50	50	
6036-24-32	35-38	1.1/2"	2"-12	1.1/2	50	72	60	55	

6810 Коннектор ORFS/BSP

Коннектор ORFS/BSP




part number	Ø tube		Dimensions						
	mm	inch	F	T	B	C	L	E	
6810-02-06	6	1/4"	9/16"-18	1/8-28	10	8	26	16	
6810-04-09	8-10	5/16"-3/8"	11/16"-16	1/4-19	11	11	31	19	
6810-06-11	12	1/2"	13/16"-16	3/8-19	13	12	35	22	
6810-08-13	16	5/8"	1"-14	1/2-14	16	14	41	27	
6810-12-14	20	3/4"	1.3/16"-12	3/4-11	17	16	46	32	
6810-16-15	25	1"	1.7/16"-12	1-11	18	19	51	38	
6810-20-21	32	1.1/4"	1.11/16"-12	1.1/4-11	18	20	54	46	
6810-24-32	38	1.1/2"	2"-12	1.1/2-11	18	22	58	55	

6800 Адаптер ORFS/BSP уплотнительное кол

Male Connector ORFS/BSP O'Ring

Резьба / Thread:

BSP (ISO 1179-3)




part number	Ø tube		Dimensions						
	mm	inch	F	T	B	C	L	E	
6800-02-06	6	1/4"	9/16"-18	1/8-28	8	10	25	16	
6800-04-06	6	1/4"	9/16"-18	1/4-19	12	10	31	19	
6800-04-09	8-10	5/16"-3/8"	11/16"-16	1/4-19	12	11	32	19	
6800-04-11	12	1/2"	13/16"-16	1/4-19	12	13	36	22	
6800-06-06	6	1/4"	9/16"-18	3/8-19	12	10	31	22	
6800-06-09	8-10	5/16"-3/8"	11/16"-16	3/8-19	12	11	32	24	
6800-06-11	12	1/2"	13/16"-16	3/8-19	12	13	34	24	
6800-06-13	14-16	5/8"	1"-14	3/8-19	11	16	37	27	
6800-08-09	8-10	5/16"-3/8"	11/16"-16	1/2-14	14	11	35	27	
6800-08-11	12	1/2"	13/16"-16	1/2-14	14	13	37	27	
6800-08-13	14-16	5/8"	1"-14	1/2-14	15	16	40	30	
6800-08-14	18-20	3/4"	1.3/16"-12	1/2-14	14	17	47	32	
6800-12-11	12	1/2"	13/16"-16	3/4-11	16	13	41	36	
6800-12-13	14-16	5/8"	1"-14	3/4-11	15	16	44	36	
6800-12-14	18-20	3/4"	1.3/16"-12	3/4-11	15	17	45	36	
6800-12-15	25	1"	1.7/16"-12	3/4-11	16	18	50	38	
6800-16-13	14-16	5/8"	1"-14	1-11	18	16	48	41	
6800-16-14	18-20	3/4"	1.3/16"-12	1-11	18	17	48	41	
6800-16-15	25	1"	1.7/16"-12	1-11	18	18	48	41	
6800-16-21	30-32	1.1/4"	1.11/16"-12	1-11	18	18	55	46	
6800-20-15	25	1"	1.7/16"-12	1.1/4-11	20	18	52	50	
6800-20-21	30-32	1.1/4"	1.11/16"-12	1.1/4-11	20	18	52	50	
6800-24-32	38	1.1/2"	2"-12	1.1/2-11	22	18	56	60	

6215

Регулируемый коннектор 90° ORFS/BSP

Adjustable Elbow ORFS/BSP

Резьба / Thread:
BSPP (ISO 1179-3)




part number	Ø tube		Dimensions						
	mm	inch	F	T	B	C	H	E	
6215-02-06	6	1/4"	9/16"-18	1/8-28	22	30	14	14	
6215-04-06	6	1/4"	9/16"-18	1/4-19	24	36	19	19	
6215-04-09	8-10	5/16"-3/8"	11/16"-16	1/4-19	25	36	19	19	
6215-04-11	12	1/2"	13/16"-16	1/4-19	28	36	19	19	
6215-06-06	6	1/4"	9/16"-18	3/8-19	25	39	19	24	
6215-06-09	8-10	5/16"-3/8"	11/16"-16	3/8-19	27	39	19	24	
6215-06-11	12	1/2"	13/16"-16	3/8-19	28	39	19	24	
6215-06-13	14-16	5/8"	1"-14	3/8-19	34	44	27	24	
6215-08-09	8-10	5/16"-3/8"	11/16"-16	1/2-14	30	49	27	27	
6215-08-11	12	1/2"	13/16"-16	1/2-14	31	49	27	27	
6215-08-14	18-20	3/4"	1.3/16"-12	1/2-14	38	50	30	27	
6215-08-13	14-16	5/8"	1"-14	1/2-14	34	49	27	27	
6215-12-11	12	1/2"	13/16"-16	3/4-11	34	52	30	36	
6215-12-13	14-16	5/8"	1"-14	3/4-11	36	52	30	36	
6215-12-14	18-20	3/4"	1.3/16"-12	3/4-11	38	52	30	36	
6215-12-15	25	1"	1.7/16"-12	3/4-11	42	58	37	36	
6215-16-14	18-20	3/4"	1.3/16"-12	1-11	41	59	37	41	
6215-16-15	25	1"	1.7/16"-12	1-11	42	59	37	41	
6215-16-21	30-32	1.1/4"	1.11/16"-12	1-11	45	61	41	41	
6215-20-15	25	1"	1.7/16"-12	1.1/4-11	45	61	41	50	
6215-20-21	30-32	1.1/4"	1.11/16"-12	1.1/4-11	45	61	41	50	
6215-24-32	38	1.1/2"	2"-12	1.1/2-11	49	65	48	60	

6260

Регулируемый коннектор 45° ORFS/BSP

Adjustable 45° Elbow ORFS/BSP

Резьба / Thread:
BSPP (ISO 1179-3)




part number	Ø tube		Dimensions						
	mm	inch	F	T	B	C	H	E	
6260-02-06	6	1/4"	9/16"-18	1/8-28	22	27	14	14	
6260-04-06	6	1/4"	9/16"-18	1/4-19	24	32	19	19	
6260-04-09	8-10	5/16"-3/8"	11/16"-16	1/4-19	25	32	19	19	
6260-04-11	12	1/2"	13/16"-16	1/4-19	28	33	19	19	
6260-06-06	6	1/4"	9/16"-18	3/8-19	25	34	24	19	
6260-06-09	8-10	5/16"-3/8"	11/16"-16	3/8-19	27	34	24	19	
6260-06-11	12	1/2"	13/16"-16	3/8-19	28	34	24	19	
6260-06-13	14-16	5/8"	1"-14	3/8-19	34	34	24	27	
6260-08-09	8-10	5/16"-3/8"	11/16"-16	1/2-14	30	42	27	27	
6260-08-11	12	1/2"	13/16"-16	1/2-14	31	42	27	27	
6260-08-14	18-20	3/4"	1.3/16"-12	1/2-14	38	46	27	30	
6260-08-13	14-16	5/8"	1"-14	1/2-14	34	42	27	27	
6260-12-11	12	1/2"	13/16"-16	3/4-11	34	47	36	30	
6260-12-13	14-16	5/8"	1"-14	3/4-11	36	47	36	30	
6260-12-14	18-20	3/4"	1.3/16"-12	3/4-11	38	47	36	30	
6260-12-15	25	1"	1.7/16"-12	3/4-11	42	47	36	37	
6260-16-14	18-20	3/4"	1.3/16"-12	1-11	41	51	41	37	
6260-16-15	25	1"	1.7/16"-12	1-11	45	51	41	37	
6260-16-21	30-32	1.1/4"	1.11/16"-12	1-11	45	52	41	41	
6260-20-15	25	1"	1.7/16"-12	1.1/4-11	45	52	50	41	
6260-20-21	30-32	1.1/4"	1.11/16"-12	1.1/4-11	45	52	50	41	
6260-24-32	38	1.1/2"	2"-12	1.1/2-11	49	52	60	48	

6340 Регулируемый коннектор 90° ORFS/BSP

Adjustable Elbow with Swivel Nut ORFS/BSP

Резьба / Thread:

BSP (ISO 1179-3)

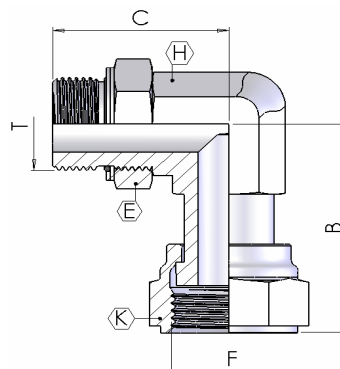


part number	Ø tube		Dimensions							
	mm	inch	F	T	B	C	E	H	K	
6340-02-06	6	1/4"	9/16"-18	1/8"	27	30	14	14	19	
6340-04-09	8-10	5/16"-3/8"	11/16"-16	1/4"	29	36	19	19	22	
6340-06-11	12	1/2"	13/16"-16	3/8"	38	39	24	19	24	
6340-08-13	14-16	5/8"	1"-14	1/2"	41	49	27	27	30	
6340-12-14	18-20	3/4"	1.3/16"-12	3/4"	47	52	36	30	36	
6340-16-15	25	1"	1.7/16"-12	1"	54	59	41	37	41	
6340-20-21	30-32	1.1/4"	1.11/16"-12	1.1/4"	58	61	50	41	50	
6340-24-32	38	1.1/2"	2"-12	1.1/2"	61	65	50	48	60	

6460 Регулируемый тройник ORFS/BSP

Adjustable Run Tee ORFS/BSP

Резьба / Thread:

BSP (ISO 1179-3)

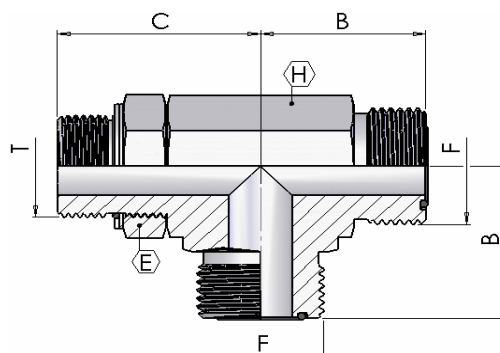


part number	Ø tube		Dimensions						
	mm	inch	F	T	B	C	H	E	
6460-02-06	6	1/4"	9/16"-18	1/8-28	22	30	14	14	
6460-04-06	6	1/4"	9/16"-18	1/4-19	24	36	19	19	
6460-04-09	8-10	5/16"-3/8"	11/16"-16	1/4-19	25	36	19	19	
6460-04-11	12	1/2"	13/16"-16	1/4-19	28	36	19	19	
6460-06-06	6	1/4"	9/16"-18	3/8-19	25	39	19	24	
6460-06-09	8-10	5/16"-3/8"	11/16"-16	3/8-19	27	39	19	24	
6460-06-11	12	1/2"	13/16"-16	3/8-19	28	39	19	24	
6460-06-13	14-16	5/8"	1"-14	3/8-19	34	44	27	24	
6460-08-09	8-10	5/16"-3/8"	11/16"-16	1/2-14	30	49	27	27	
6460-08-11	12	1/2"	13/16"-16	1/2-14	31	49	27	27	
6460-08-14	18-20	3/4"	1.3/16"-12	1/2-14	38	50	30	27	
6460-08-13	14-16	5/8"	1"-14	1/2-14	34	49	27	27	
6460-12-11	12	1/2"	13/16"-16	3/4-11	34	52	30	36	
6460-12-13	14-16	5/8"	1"-14	3/4-11	36	52	30	36	
6460-12-14	18-20	3/4"	1.3/16"-12	3/4-11	38	52	30	36	
6460-12-15	25	1"	1.7/16"-12	3/4-11	42	58	37	36	
6460-16-14	18-20	3/4"	1.3/16"-12	1-11	41	59	37	41	
6460-16-15	25	1"	1.7/16"-12	1-11	42	59	37	41	
6460-16-21	30-32	1.1/4"	1.11/16"-12	1-11	45	61	41	41	
6460-20-15	25	1"	1.7/16"-12	1.1/4-11	45	61	41	50	
6460-20-21	30-32	1.1/4"	1.11/16"-12	1.1/4-11	45	61	41	50	
6460-24-32	38	1.1/2"	2"-12	1.1/2-11	49	65	48	60	

6410 Регулируемый тройник ORFS/BSP

Adjustable Branch Tee ORFS/BSP

Резьба / Thread:

BSPP (ISO 1179-3)

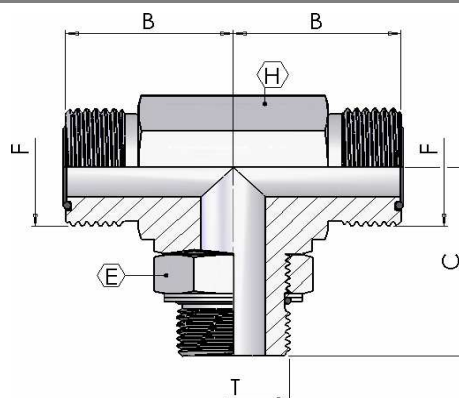


part number	Ø tube		Dimensions						
	mm	inch	F	T	B	C	H	E	
6410-02-06	6	1/4"	9/16"-18	1/8-28	22	30	14	14	
6410-04-06	6	1/4"	9/16"-18	1/4-19	24	36	19	19	
6410-04-09	8-10	5/16"-3/8"	11/16"-16	1/4-19	25	36	19	19	
6410-04-11	12	1/2"	13/16"-16	1/4-19	28	36	19	19	
6410-06-06	6	1/4"	9/16"-18	3/8-19	25	39	19	24	
6410-06-09	8-10	5/16"-3/8"	11/16"-16	3/8-19	27	39	19	24	
6410-06-11	12	1/2"	13/16"-16	3/8-19	28	39	19	24	
6410-06-13	14-16	5/8"	1"-14	3/8-19	34	44	27	24	
6410-08-09	8-10	5/16"-3/8"	11/16"-16	1/2-14	30	49	27	27	
6410-08-11	12	1/2"	13/16"-16	1/2-14	31	49	27	27	
6410-08-14	18-20	3/4"	1.3/16"-12	1/2-14	38	50	30	27	
6410-08-13	14-16	5/8"	1"-14	1/2-14	34	49	27	27	
6410-12-11	12	1/2"	13/16"-16	3/4-11	34	52	30	36	
6410-12-13	14-16	5/8"	1"-14	3/4-11	36	52	30	36	
6410-12-14	18-20	3/4"	1.3/16"-12	3/4-11	38	52	30	36	
6410-12-15	25	1"	1.7/16"-12	3/4-11	42	58	37	36	
6410-16-14	18-20	3/4"	1.3/16"-12	1-11	41	59	37	41	
6410-16-15	25	1"	1.7/16"-12	1-11	42	59	37	41	
6410-16-21	30-32	1.1/4"	1.11/16"-12	1-11	45	61	41	41	
6410-20-15	25	1"	1.7/16"-12	1.1/4-11	45	61	41	50	
6410-20-21	30-32	1.1/4"	1.11/16"-12	1.1/4-11	45	61	41	50	
6410-24-32	38	1.1/2"	2"-12	1.1/2-11	49	65	48	60	

6125 Коннектор гайка-штуцер ORFS/JIC

Swivel Nut Female ORFS/JIC

Резьба / Thread:

UN/UNF (ISO 8434-2)

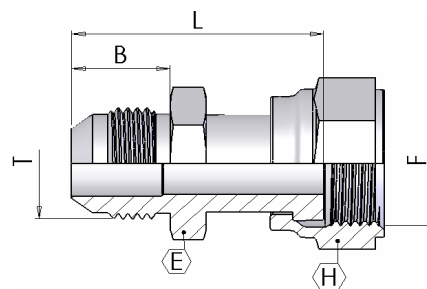


part number	Ø tube		Dimensions						
	mm	inch	F	T	B	L	E	H	
6125-04-06	6	1/4"	9/16"-18	7/16-20	14	41	13	19	
6125-06-09	8-10	5/16"-3/8"	11/16"-16	9/16-18	14	43	16	22	
6125-08-11	12	1/2"	13/16"-16	3/4-16	17	53	22	24	
6125-10-13	16	5/8"	1"-14	7/8-14	20	58	24	30	
6125-12-14	20	3/4"	1.3/16"-12	1.1/16-12	22	64	30	36	
6125-16-15	25	1"	1.7/16"-12	1.5/16-12	23	72	36	41	
6125-20-21	32	1.1/4"	1.11/16"-12	1.5/8-12	25	74	42	50	
6125-24-32	38	1.1/2"	2"-12	1.7/8-12	28	77	50	60	

6900 Коннектор ORFS/метрика DIN 3852-1

Коннектор ORFS/метрика DIN 3852-1

Резьба / Thread:

Metric Parallel




part number	Ø tube		Dimensions						
	mm	inch	F	T	B	C	L	E	
6900-10-06	6	1/4"	9/16"-18	M10x1	9	34	26	16	
6900-12-06	6	1/4"	9/16"-18	M12x1,5	12	34	29	17	
6900-14-09	8-10	5/16"-3/8"	11/16"-16	M14x1,5	-	37	31	19	
6900-16-09	8-10	5/16"-3/8"	11/16"-16	M16x1,5	13	37	33	22	
6900-16-11	12	1/2"	13/16"-16	M16x1,5	-	45	38	22	
6900-18-11	12	1/2"	13/16"-16	M18x1,5	14	45	36	24	
6900-18-13	14-16	5/8"	1"-14	M18x1,5	-	53	43	27	
6900-22-13	14-16	5/8"	1"-14	M22x1,5	15	53	41	30	
6900-22-14	18-20	3/4"	1.3/16"-12	M22x1,5	-	64	-	32	
6900-27-14	18-20	3/4"	1.3/16"-12	M27x2	19	64	48	36	
6900-27-15	25	1"	1.7/16"-12	M27x2	-	73	-	38	
6900-33-15	25	1"	1.7/16"-12	M33x2	19	73	50	41	
6900-42-21	30-32	1.1/4"	1.11/16"-12	M42x2	19	87	53	50	
6900-48-32	38	1.1/2"	2"-12	M48x2	22	97	55	60	

6920

Коннектор удлиненный ORFS/метрика DIN 3852-2

Long Male Connector ORFS/ Metric DIN 3852-1

Резьба / Thread:
Metric Parallel

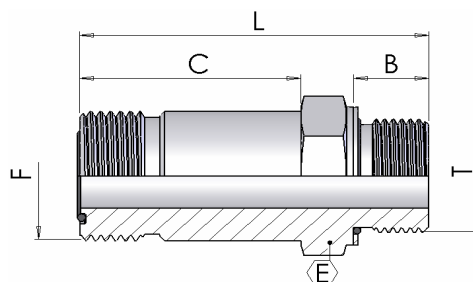


part number	Ø tube		Dimensions						
	mm	inch	F	T	B	C	L	E	
6920-10-06	6	1/4"	9/16"-18	M10x1	9	34	50	16	
6920-12-06	6	1/4"	9/16"-18	M12x1,5	12	34	53	17	
6920-14-09	8-10	5/16"-3/8"	11/16"-16	M14x1,5	-	37	57	19	
6920-16-09	8-10	5/16"-3/8"	11/16"-16	M16x1,5	13	37	59	22	
6920-16-11	12	1/2"	13/16"-16	M16x1,5	-	45	69	22	
6920-18-11	12	1/2"	13/16"-16	M18x1,5	14	45	68	24	
6920-18-13	14-16	5/8"	1"-14	M18x1,5	-	53	80	27	
6920-22-13	14-16	5/8"	1"-14	M22x1,5	15	53	78	30	
6920-22-14	18-20	3/4"	1.3/16"-12	M22x1,5	-	64	-	32	
6920-27-14	18-20	3/4"	1.3/16"-12	M27x2	19	64	95	36	
6920-27-15	25	1"	1.7/16"-12	M27x2	-	73	-	38	
6920-33-15	25	1"	1.7/16"-12	M33x2	19	73	106	41	
6920-42-21	30-32	1.1/4"	1.11/16"-12	M42x2	19	87	122	50	
6920-48-32	38	1.1/2"	2"-12	M48x2	22	97	135	60	

6320

Регулируемый коннектор 90° ORFS/метрика DIN 3852-3

Adjustable Elbow ORFS/ Metric DIN 3852-1

Резьба / Thread:
Metric Parallel




part number	Ø tube		Dimensions						
	mm	inch	F	T	B	C	H	E	
6320-10-06	6	1/4"	9/16"-18	M10x1	22	32	14	14	
6320-12-06	6	1/4"	9/16"-18	M12x1,5	22	33	14	17	
6320-14-09	8-10	5/16"-3/8"	11/16"-16	M14x1,5	25	37	19	19	
6320-16-09	8-10	5/16"-3/8"	11/16"-16	M16x1,5	25	37	19	22	
6320-16-11	12	1/2"	13/16"-16	M16x1,5	28	40	19	22	
6320-18-11	12	1/2"	13/16"-16	M18x1,5	28	40	19	24	
6320-18-13	14-16	5/8"	1"-14	M18x1,5	34	45	27	24	
6320-22-13	14-16	5/8"	1"-14	M22x1,5	34	49	27	27	
6320-22-14	18-20	3/4"	1.3/16"-12	M22x1,5	38	50	30	27	
6320-27-14	18-20	3/4"	1.3/16"-12	M27x2	38	55	30	36	
6320-27-15	25	1"	1.7/16"-12	M27x2	42	56	37	36	
6320-33-15	25	1"	1.7/16"-12	M33x2	42	60	37	41	
6320-42-21	30-32	1.1/4"	1.11/16"-12	M42x2	45	62	41	50	
6320-48-32	38	1.1/2"	2"-12	M48x2	49	68	48	60	

6940

Удлиненный регулируемый коннектор 90° ORFS/ метрика DIN 3852-4

Long Adjustale Elbow ORFS/ Metric DIN 3852-1

Резьба / Thread:
Metric Parallel

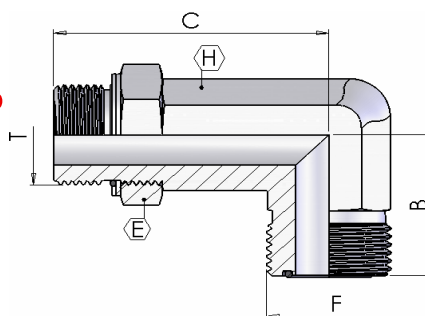


part number	Ø tube		Dimensions						
	mm	inch	F	T	B	C	L	E	
6940-10-06	6	1/4"	9/16"-18	M10x1	22	56	14	14	
6940-12-06	6	1/4"	9/16"-18	M12x1,5	22	57	14	17	
6940-14-09	8-10	5/16"-3/8"	11/16"-16	M14x1,5	25	66	19	19	
6940-16-09	8-10	5/16"-3/8"	11/16"-16	M16x1,5	25	72	19	22	
6940-16-11	12	1/2"	13/16"-16	M16x1,5	28	74	19	22	
6940-18-11	12	1/2"	13/16"-16	M18x1,5	28	75	19	24	
6940-18-13	14-16	5/8"	1"-14	M18x1,5	34	84	27	24	
6940-22-13	14-16	5/8"	1"-14	M22x1,5	34	88	27	27	
6940-22-14	18-20	3/4"	1.3/16"-12	M22x1,5	38	96	30	27	
6940-27-14	18-20	3/4"	1.3/16"-12	M27x2	38	100	30	36	
6940-27-15	25	1"	1.7/16"-12	M27x2	42	111	37	36	
6940-33-15	25	1"	1.7/16"-12	M33x2	42	115	37	41	
6940-42-21	30-32	1.1/4"	1.11/16"-12	M42x2	45	127	41	50	
6940-48-32	38	1.1/2"	2"-12	M48x2	49	142	48	60	

6270

Регулируемый коннектор 45° ORFS/метрика DIN 3852-3

Adjustable 45° Elbow ORFS/ Metric DIN 3852-1

Резьба / Thread:
Metric Parallel




part number	Ø tube		Dimensions						
	mm	inch	F	T	B	C	H	E	
6270-10-06	6	1/4"	9/16"-18	M10x1	16	30	14	14	
6270-12-06	6	1/4"	9/16"-18	M12x1,5	16	30	14	17	
6270-14-09	8-10	5/16"-3/8"	11/16"-16	M14x1,5	19	-	19	19	
6270-16-09	8-10	5/16"-3/8"	11/16"-16	M16x1,5	19	34	19	22	
6270-16-11	12	1/2"	13/16"-16	M16x1,5	21	-	19	22	
6270-18-11	12	1/2"	13/16"-16	M18x1,5	21	37	19	24	
6270-18-13	14-16	5/8"	1"-14	M18x1,5	24	-	27	24	
6270-22-13	14-16	5/8"	1"-14	M22x1,5	24	44	27	27	
6270-22-14	18-20	3/4"	1.3/16"-12	M22x1,5	26	-	30	27	
6270-27-14	18-20	3/4"	1.3/16"-12	M27x2	26	51	30	36	
6270-27-15	25	1"	1.7/16"-12	M27x2	30	-	37	36	
6270-33-15	25	1"	1.7/16"-12	M33x2	30	53	37	41	
6270-42-21	30-32	1.1/4"	1.11/16"-12	M42x2	32	54	41	50	
6270-48-32	38	1.1/2"	2"-12	M48x2	37	57	48	60	

6420 Регулируемый тройник ORFS/метрика DIN 3852-4

Adjustable Branch Tee ORFS/ Metric DIN 3852-1

Резьба / Thread:
Metric Parallel

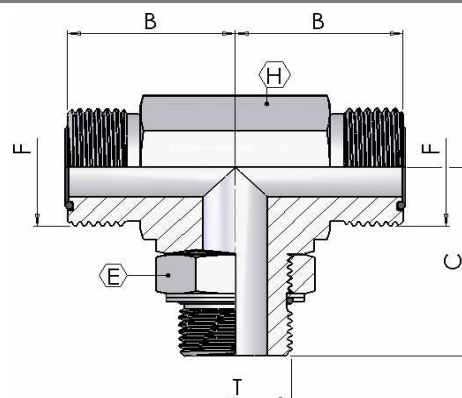


part number	Ø tube		Dimensions						
	mm	inch	F	T	B	C	H	E	
6420-10-06	6	1/4"	9/16"-18	M10x1	22	32	14	14	
6420-12-06	6	1/4"	9/16"-18	M12x1,5	22	33	14	17	
6420-14-09	8-10	5/16"-3/8"	11/16"-16	M14x1,5	25	37	19	19	
6420-16-09	8-10	5/16"-3/8"	11/16"-16	M16x1,5	25	37	19	22	
6420-16-11	12	1/2"	13/16"-16	M16x1,5	28	40	19	22	
6420-18-11	12	1/2"	13/16"-16	M18x1,5	28	40	19	24	
6420-18-13	14-16	5/8"	1"-14	M18x1,5	34	45	27	24	
6420-22-13	14-16	5/8"	1"-14	M22x1,5	34	49	27	27	
6420-22-14	18-20	3/4"	1.3/16"-12	M22x1,5	38	50	30	27	
6420-27-14	18-20	3/4"	1.3/16"-12	M27x2	38	55	30	36	
6420-27-15	25	1"	1.7/16"-12	M27x2	42	56	37	36	
6420-33-15	25	1"	1.7/16"-12	M33x2	42	60	37	41	
6420-42-21	30-32	1.1/4"	1.11/16"-12	M42x2	45	62	41	50	
6420-48-32	38	1.1/2"	2"-12	M48x2	49	68	48	60	

6470 Регулируемый тройник ORFS/метрика DIN 3852-4

Adjustable Run Tee ORFS/ Metric DIN 3852-1

Резьба / Thread:
Metric Parallel

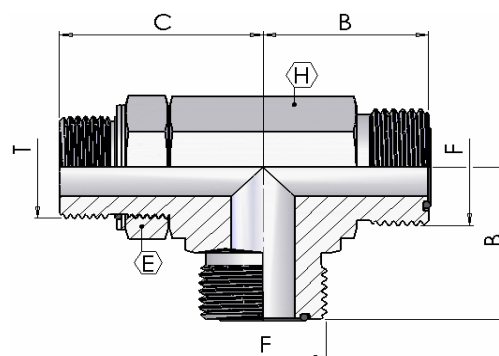


part number	Ø tube		Dimensions						
	mm	inch	F	T	B	C	H	E	
6470-10-06	6	1/4"	9/16"-18	M10x1	22	32	14	14	
6470-12-06	6	1/4"	9/16"-18	M12x1,5	22	33	14	17	
6470-14-09	8-10	5/16"-3/8"	11/16"-16	M14x1,5	25	37	19	19	
6470-16-09	8-10	5/16"-3/8"	11/16"-16	M16x1,5	25	37	19	22	
6470-16-11	12	1/2"	13/16"-16	M16x1,5	28	40	19	22	
6470-18-11	12	1/2"	13/16"-16	M18x1,5	28	40	19	24	
6470-18-13	14-16	5/8"	1"-14	M18x1,5	34	45	27	24	
6470-22-13	14-16	5/8"	1"-14	M22x1,5	34	49	27	27	
6470-22-14	18-20	3/4"	1.3/16"-12	M22x1,5	38	50	30	27	
6470-27-14	18-20	3/4"	1.3/16"-12	M27x2	38	55	30	36	
6470-27-15	25	1"	1.7/16"-12	M27x2	42	56	37	36	
6470-33-15	25	1"	1.7/16"-12	M33x2	42	60	37	41	
6470-42-21	30-32	1.1/4"	1.11/16"-12	M42x2	45	62	41	50	
6470-48-32	38	1.1/2"	2"-12	M48x2	49	68	48	60	

6840 Коннектор ORFS/метрика ISO 6149-2

Male Connector ORFS/ Metric ISO 6149-2


Резьба / Thread:
Metric (ISO 6149-2)



part number	Ø tube		Dimensions						
	mm	inch	F	T	B	C	L	E	
6840-10-06	6	1/4"	9/16"-18	M10x1	9,8	9	27	17	
6840-12-06	6	1/4"	9/16"-18	M12x1,5	9,8	11	29	17	
6840-12-09	8-10	5/16"-3/8"	11/16"-16	M12x1,5	11,2	11	34	19	
6840-14-06	6	1/4"	9/16"-18	M14x1,5	9,8	11	30	19	
6840-14-09	8-10	5/16"-3/8"	11/16"-16	M14x1,5	11,2	11	31	19	
6840-14-11	12	1/2"	13/16"-16	M14x1,5	12,8	11	35	22	
6840-16-09	8-10	5/16"-3/8"	11/16"-16	M16x1,5	11,2	13	34	22	
6840-16-11	12	1/2"	13/16"-16	M16x1,5	12,8	13	37	24	
6840-18-09	8-10	5/16"-3/8"	11/16"-16	M18x1,5	11,2	14	35	24	
6840-18-11	12	1/2"	13/16"-16	M18x1,5	12,8	14	37	24	
6840-18-13	14-15-16	5/8"	1"-14	M18x1,5	15,5	14	41	27	
6840-22-09	8-10	5/16"-3/8"	11/16"-16	M22x1,5	11,2	15	38	27	
6840-22-11	12	1/2"	13/16"-16	M22x1,5	12,8	15	39	27	
6840-22-13	14-15-16	5/8"	1"-14	M22x1,5	15,5	15	42	27	
6840-22-14	18-20	3/4"	1.3/16"-12	M22x1,5	17,0	15	50	32	
6840-27-11	12	1/2"	13/16"-16	M27x2	12,8	18	44	32	
6840-27-14	18-20	3/4"	1.3/16"-12	M27x2	17,0	19	49	32	
6840-27-15	22-25	1"	1.7/16"-12	M27x2	17,5	18	54	41	
6840-33-14	18-20	3/4"	1.3/16"-12	M33x2	17,0	19	50	41	
6840-33-15	22-25	1"	1.7/16"-12	M33x2	17,5	18	52	41	
6840-33-21	28-30-32	1.1/4"	1.11/16"-12	M33x2	17,5	18	54	46	
6840-42-21	28-30-32	1.1/4"	1.11/16"-12	M42x2	17,5	19	55	50	
6840-42-32	35-38	1.1/2"	2"-12	M42x2	17,5	19	60	55	
6840-48-32	35-38	1.1/2"	2"-12	M48x2	17,5	21	57	55	

6600 Заглушка штуцер


Male plug



part number	Dimensions				
	F	C	L	E	
6600-06	9/16 - 18	10	17	17	
6600-09	11/16 - 16	11	19	19	
6600-11	13/16 - 16	13	22	22	
6600-13	1 - 14	16	26	27	
6600-14	1.3/16 - 12	17	27	32	
6600-15	1.7/16 - 12	18	28	38	
6600-21	1.11/16 - 12	18	28	46	
6600-32	2 - 12	18	28	55	

6610 Заглушка гайка

Female Plug Swivel



part number	Dimensions				
	F		L	E	
6610-06	9/16 - 18		13	19	
6610-09	11/16 - 16		15	22	
6610-11	13/16 - 16		15	24	
6610-13	1 - 14		17	30	
6610-14	1.3/16 - 12		16	36	
6610-15	1.7/16 - 12		19	41	
6610-21	1.11/16 - 12		22	50	
6610-32	2 - 12		22	60	

Съемная гайка
Съемная гайка

